



Front

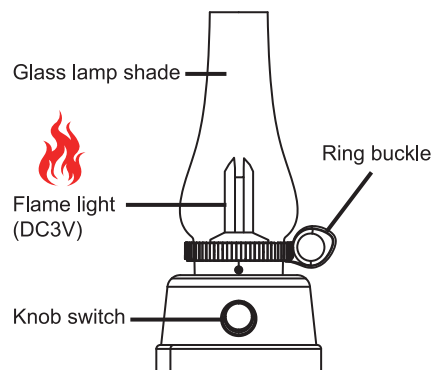

Rated power(W)	: 3.2W
Rated voltage(V)	: Dedicated for DC3V bulb
Dimming range(W)	: 10%~100%(0.4W~3.5W)
Colour temp(K):	: 2200~6500K (CCT Adjustable)
CRI(Ra)	: Ra≥80
Luminous flux(Lm)	: 20~250lm
USB output/input	: 5V/1A
Battery type	: Lithium battery 18650*2pcs or AA*3pcs
Battery capacity(mAh)	: According to their own conditions
Charging time(H)	: ≥7hours (only support 18650 Li-on battery)
Endurance time(H)	: 8~75 Hours(Li-on battery 5000mAh)
Working temp(°C)	: -20°C~60°C
Working humidity(%)	: ≤95%
Storage condition	: Dry ventilated place
Size	: 126*280mm
Light body materials	: Plastic + Iron + Bamboo + Glass
IP rating(IP)	: IPX4

Back

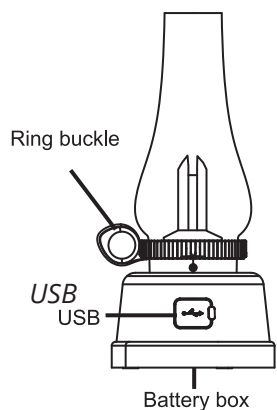

Knob switch


- A: Press knob 1s to turn on lamp. Default lighting mode is lowest lumen. The light gets brighter by turning knob clockwise and counter-clockwise for darken.
- B: Press knob for Flame function(second mode),The light gets brighter by turning knob clockwise and counter-clockwise for darken.
- C: Press knob for Warm light(Third mode),The light gets brighter by turning knob clockwise and counter-clockwise for darken.
- D: It takes 3-4 rounds for the knob to switch the light from Darkest level to Brightest level.

Note: Long press knob for switch on/off lamp, short press for mode switching.

The lamp will be turned off automatically if the voltage of battery is lower than 3V, which means it needed to recharge. Please turn off the light while recharging.

USB

As the below picture shown, open the rubber cover:



DC 5V adaptor (not included)
Do not use unmatched adaptor

The green indicator flickers say power charging, green light going on say full with power. When the USB output interface is used for external equipment charging, the red indicator going on and the indicator flicker means power off.


Notice: USB output interface is not available during charging.

Notes:

1. Only for DC+5V adaptor.
2. No water protection function so please do not expose it in the rain.
3. To prevent it from battery damage as overfall, please charge timely when power off.
4. Please charge once per three months if not use for quite some time.
5. To prevent it from water and dust contaminant, please cover the USB output interface with waterproof film when it not in use.
6. In order to avoid accidents, please do not put it into fire.



Voorzijde

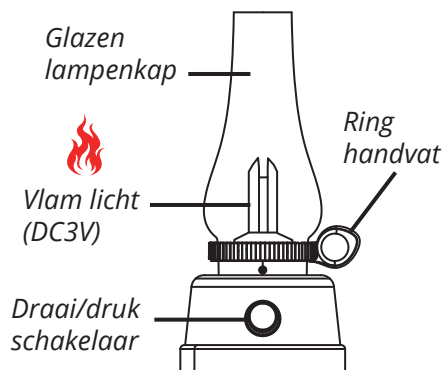

Nominaal vermogen	: 3.2 W
Nominale spanning	: Geschikt voor DC3V lamp
Dimbereik:	: 10-100% (0.4W-3.5W)
Kleurtemperatuur	: 2200-6500K (Instelbare CCT)
Kleurweergave-index (RA)	: RA>80
Lichtstroom (Lm)	: 20-250 Lumen
USB uitgang/ingang	: 5V - 1A
Batterij-type	: Lithium batterij 18650 *2 of AA *3
Batterij capaciteit	: (mAh)
Oplaaftijd	: >7 uur
Uithoudingsvermogen (uur)	: 8-75 uur
Werktemperatuur	: -20 - 60 C
Bedrijfsvochtigheid	: <95%
Opslagconditie	: Droge geventileerde plaats
Afmetingen	: 126 x 280 mm
Materialen	: Plastic, ijzer, bamboe, glas
IP-classificatie	: IPX4

Draai/druk schakelaar

A. Houdt de knop 1s ingedrukt om de lamp aan te zetten. Draai de knop met de klok mee om de lichtintensiteit te verhogen, draai de knop tegen de klok in om de lichtintensiteit te verlagen.


B. Druk op de knop om de vlam functie aan te zetten. Draai de knop met de klok mee om de lichtintensiteit te verhogen, draai de knop tegen de klok in om de lichtintensiteit te verlagen.

C. Druk nogmals op de knop voor de warm licht modus, draai de knop met de klok mee om de lichtintensiteit te verhogen, draai de knop tegen de klok in om de lichtintensiteit te verlagen.


Houdt de knop lang ingedrukt om de lamp aan of uit te zetten. Druk kort op de knop om over te schakelen naar een andere modus.


De lamp schakelt zichzelf uit als de batterij bijna leeg is. Laat de lamp uit tijdens het opladen.

Achterzijde

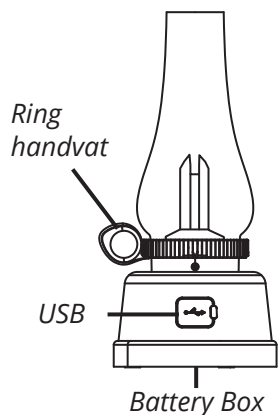

USB Open de rubberen afdekkap zoals op onderstaande figuur:



 DC 5V adapter (niet inbegrepen)
Gebruik alleen passende adapters!

Wanneer het groene lampje knippert is de lamp aan het opladen. Wanneer het groene lampje ononderbroken brandt is de lamp volledig opgeladen. Als de USB uitgang gebruikt wordt als powerbank gaat het rode lampje branden. De USB uitgang/powerbank is niet bruikbaar tijdens het opladen.

Belangrijk:

1. Alleen geschikt voor DC+5V adapters.
2. De lamp niet in de regen laten staan en niet nat laten worden.
3. Laad de lamp tijdig op om beschadiging aan de batterij te voorkomen.
4. Laad de lamp eens in de drie maanden op, ook wanneer deze niet gebruikt wordt.
5. Gebruik altijd de rubberen afdekkap van de USB poorten wanneer je de lamp niet gebruikt.
6. Niet in de buurt van vuur gebruiken.

